




## 20m Diesel Articulating Boom

## **MACHINE SPECIFICATION SHEET**

## **BA60DS**

| REACH HEIGHT       | 20.46m                 |
|--------------------|------------------------|
| PLATFORM HEIGHT    | 18.46m                 |
| CLOSED LENGTH      | 8.82m                  |
| CLOSED HEIGHT      | 2.57m                  |
| WHEELBASE          | 2.49m                  |
| TURNING RADIUS     | 3.90m                  |
| LIFTING CAPACITY   | 230kg                  |
| WEIGHT             | 12,260kg               |
| ROTATION           | 360°                   |
| HORIZONTAL REACH   | 14.00m                 |
| CAGE DIMENSIONS    | 0.80x1.80m             |
| IPAF CATEGORY      | 3b                     |
| POWER              | DIESEL                 |
|                    |                        |
| FEATURED MODEL     | JLG 600AJ              |
| ALTERNATIVE MODELS | GENIE Z60/34           |
|                    | <b>HAULOTTE HA20PX</b> |

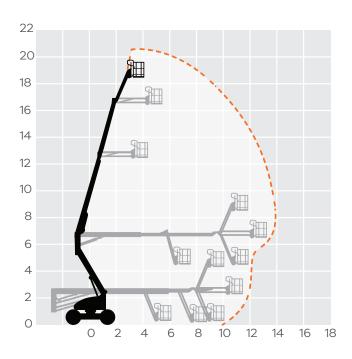



The JLG 600AJ offers the following range of benefits:

- The articulating jib booms offer precise platform positioning, ideal for work areas that may be confined or difficult to access
- Offering outreach and up-and-over clearance they offer a flexible solution for many applications
- 4x4 offers strong traction where ground conditions are challenging
- Suitable for a variety of applications construction, maintenance, or industrial

The information provided is for guidance only. It may change at any time in accordance with manufacturer's specification.

Call: 03303 115 105