

# 17m Diesel/Electric Spider Lift


## MACHINE SPECIFICATION SHEET

### TR17

REACH HEIGHT	16.81m
PLATFORM HEIGHT	15.06m
CLOSED LENGTH	4.53m
CLOSED HEIGHT	1.99m
CLOSED WIDTH	1.48m
HORIZONTAL REACH	8.33m
WIDTH MAX WORKING	2.89m
WIDTH MIN WORKING	2.89m
SAFE WORKING LOAD	230kg
WEIGHT	2,100kg
CAGE DIMENSIONS	1.33x0.65m
GRADEABILITY	36%
CAGE ROTATION	124° (+/-62°)
IPAF CATEGORY	1b
SLEW	360°
UP AND OVER CLEARANCE	7.80m
MINIMUM SETUP AREA	1.48x4.53m (WxL)
TRACK SURFACE AREA	N/A
DRIVE SPEED	1.7km/h
MAXIMUM SETUP INCLINE	19.4% (11°)
NO. OUTRIGGER POSITIONS	1 fixed
POWER	ELECTRIC/ DIESEL

### FLOOR LOADINGS

MAX. LOAD PER OUTRIGGER	2.04 kg/cm <sup>2</sup>
MAX. LOAD PER SURFACE PRESSURE	N/A
MAX. GROUND PRESSURE WITH STANDARD OUTRIGGER PADS	2.04 kg/cm <sup>2</sup>
FEATURED MODEL	JLG JLGX17J

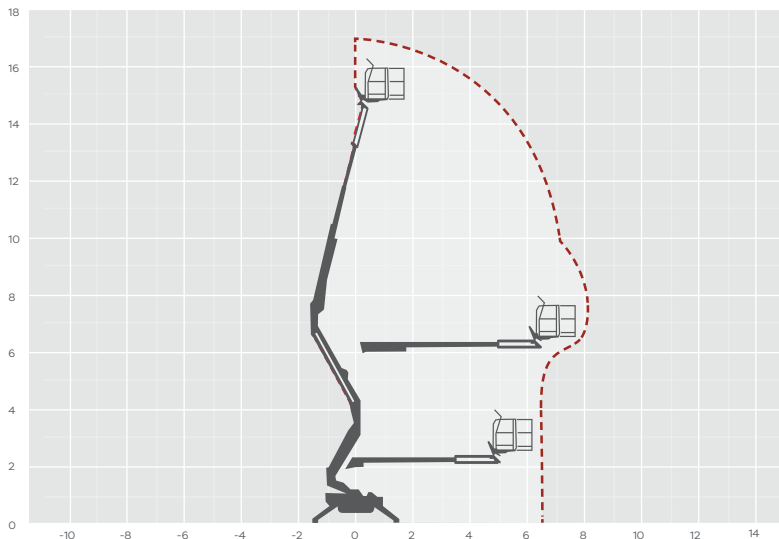

The JLG JLGX17J spider lift for hire has a reach height of 16.81m and a horizontal reach of 8.33m. Specialist design with near square outrigger pattern, removable outrigger pads, removable basket, and equipped with a crawler carriage allowing it to climb grades up to 36%. Exceptional flexibility equipped with an electrical engine and a diesel, optional lithium batteries is available.

The information provided is for guidance only. It may change at any time in accordance with manufacturer's specification. Variable jacking will envelope. Outreach is variable depending on load, angle of rotation and outrigger configuration.

