



17m Diesel/Mains Spider Lift


MACHINE SPECIFICATION SHEET

TR17

REACH HEIGHT	17.06m
PLATFORM HEIGHT	15.06m
CLOSED LENGTH	4.53m
CLOSED HEIGHT	1.99m
CLOSED WIDTH	1.48m
HORIZONTAL REACH	7.50m
WIDTH MAX WORKING	2.89m
WIDTH MIN WORKING	2.89m
SAFE WORKING LOAD	230kg
WEIGHT	2,230kg
CAGE DIMENSIONS	1.33x0.65m
GRADEABILITY	36%
CAGE ROTATION	124° (+/-62°)
IPAF CATEGORY	1b
SLEW	360°
UP AND OVER CLEARANCE	7.80m
MINIMUM SETUP AREA	1.48x4.53m (WxL)
TRACK SURFACE AREA	N/A
DRIVE SPEED	1.7km/h
MAXIMUM SETUP INCLINE	19.4% (11°)
NO. OUTRIGGER POSITIONS	1 fixed
POWER	DIESEL/ MAINS

FLOOR LOADINGS

MAX. LOAD PER OUTRIGGER	2.04 kg/cm ²
MAX. LOAD PER SURFACE PRESSURE	N/A
MAX. GROUND PRESSURE WITH STANDARD OUTRIGGER PADS	2.04 kg/cm ²
FEATURED MODEL	Hinowa Lightlift 17.75

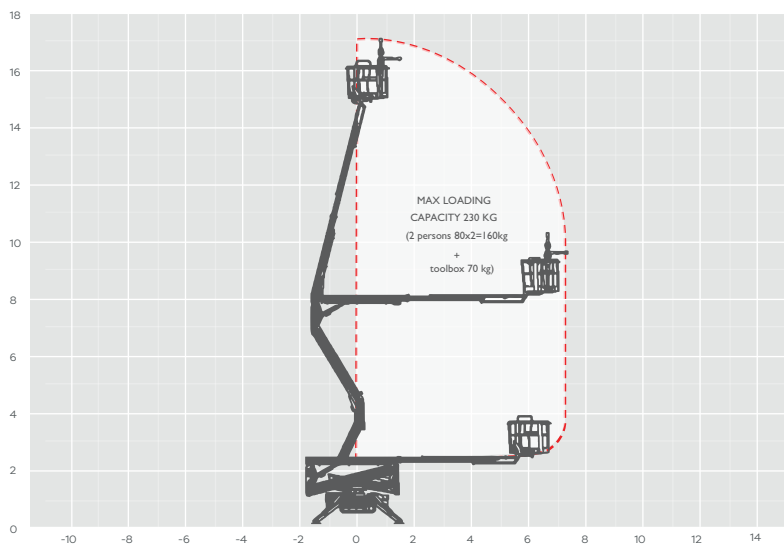

The Hinowa Lightlift 17.75 spider lift is a powerful and compact model that is highly efficient, featuring advanced technology developed by an outstanding in-house team. It includes a safety system enabling precise, fast, and reliable operation at heights of up to 17.06 meters.

The information provided is for guidance only. It may change at any time in accordance with manufacturer's specification. Variable jacking will envelope. Outreach is variable depending on load, angle of rotation and outrigger configuration.

