



# 22m Truck Mount

## MACHINE SPECIFICATION SHEET



### TM22

|                    |                 |
|--------------------|-----------------|
| REACH HEIGHT       | 22.00m          |
| PLATFORM HEIGHT    | 20.00m          |
| CLOSED LENGTH      | 8.82m           |
| CLOSED HEIGHT      | 3.52m           |
| CLOSED WIDTH       | 2.40m           |
| HORIZONTAL REACH   | 17.20m          |
| WIDTH MAX WORKING  | 5.00m           |
| WIDTH MIN WORKING* | 2.40m variable  |
| SAFE WORKING LOAD  | 280kg           |
| WEIGHT             | 8,000kg         |
| CAGE DIMENSIONS    | 1.80x0.80x1.10m |
| CAGE ROTATION      | 155°            |
| IPAF CATEGORY      | 1b              |
| SLEW               | 365°            |
| FEATURED MODEL     | GSR 228J        |



The GSR 228J has a reach height of 22.00m, a horizontal reach of 17.20m and a Safe Working Load of 280kg allowing for 2 persons in the basket. The GSR 228J truck mount is an ideal access platform for facilities management, pest control and film and media.

The information provided is for guidance only. It may change at any time in accordance with manufacturer's specification. Variable jacking will affect the working envelope. Outreach is variable depending on load, angle of rotation and outrigger configuration.

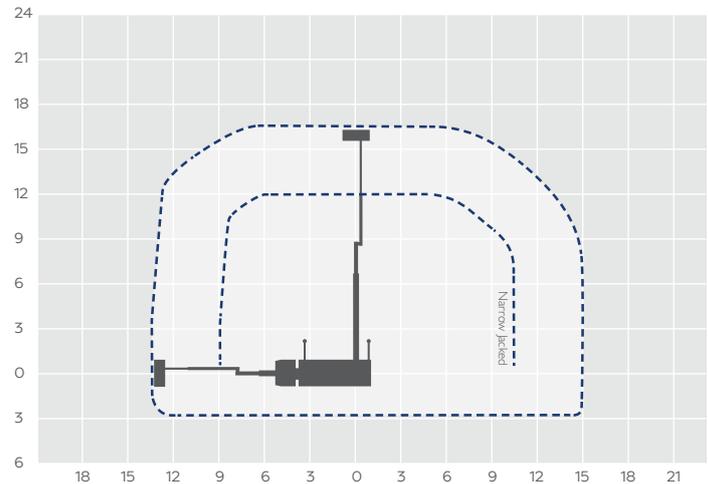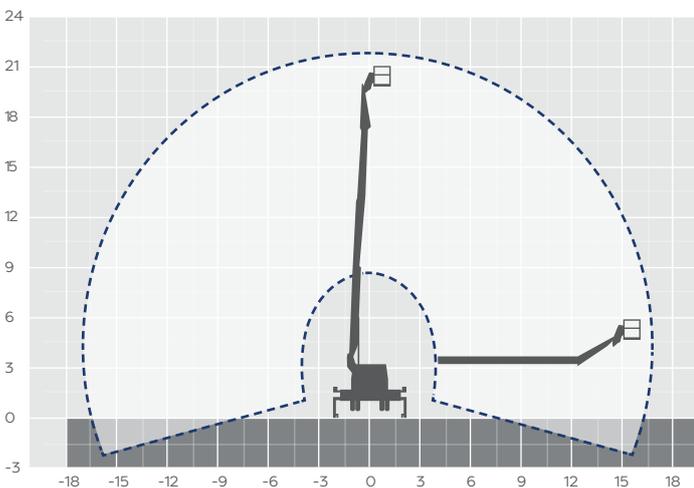

Side profile

